

F&eIT Series Isolated Digital Input Module DI-8(FIT)GY



* Specifications, color and design of the products are subject to change without notice.

Features

This product can perform 8-point digital signal input, treating 8 points as a group.

Input section is ready to accept both the current sinking output and current source output.

Isolated input operations using an optocoupler improves noise immunity.

A rotary switch allows you to set device IDs, making it easy to keep track of device numbers.

Like other F&eIT series products, the module has a 35mm DIN rail mounting mechanism as standard. A connection to a controller module can be effected on a lateral, stack basis in a unique configuration, which permits a simple, smart system configuration without the need for a backplane board.

Packing List

Module[DI-8(FIT)GY] ...1
First step guide ... 1
CD-ROM [F&eIT Series Setup Disk] *1...1
Interface connector plug...1

*1 The CD-ROM contains various software and User's Guide.

This product is an expansion module (device module) that adds digital signal input interfaces to one of various types of controllers. The product is used in combination with the I/O controller module <CPU-CAXx(FIT)GY> (*1) or microcontroller unit <CPU-SBxx(FIT)GY> (*1) in the F&eIT Series.

This product can perform a maximum of 8 points of Optocoupler isolated input per module.
(12 - 24 VDC specified)

*1 This module is available in different product models. "x" in each model number represents a blank or one alphanumeric character. This is applicable to the rest of this document.

Specification

Specifications

Specifications	
Item	Specifications
	DI-8(FIT)GY
Input section	
Input format	Optocoupler isolated input (compatible with current sink output and current source output)
Input resistance	3k Ω
Input ON current	3.4mA or more
Input OFF current	0.16mA or less
Number of input signal points	8 points (8 points/common)
Response time	Within 1msec
External circuit power supply	12 - 24VDC ($\pm 15\%$) (4mA/12V - 8mA/24V per channel)
Common section	
Interrupt level	Using CPU-SBxx(FIT)GY: IRQ 5, 7, or 9
External circuit power supply	12 - 24VDC ($\pm 15\%$)
Internal current consumption	5VDC($\pm 5\%$) 150mA(Max.) *1
Allowable distance of signal extension	Approx. 50m (depending on wiring environment)
Physical dimensions (mm)	25.2(W) x 64.7(D) x 94.0(H) (exclusive of protrusions)
Weight of the module itself	100g
Module connection method	Stack connection by means of a connection mechanism standard with the system
Module installation method	One-touch connection to 35mm DIN rails (standard connection mechanism provided in the system)
Applicable wire	AWG 28 - 16 wire type: 0.32 - 1.30mm
Applicable plug	FRONT-MC 1,5/12-STF-3,81 (made by Phoenix Contact Corp.) 3.81mm-pitch, rated current: 8A (Max.)

*1 The stack connector accepts currents of up to 3.0A (Max.).

Installation Environment Requirements


Item		Requirement description
Operating temperature		0 - 50°C
Storage temperature		-10 - 60°C
Operating humidity		10 - 90%RH (No condensation)
Floating dust particles		Not to be excessive
Corrosive gases		None
Noise immunity	Line-noise *1	AC line/2kV, Signal line/1kV (IEC1000-4-4Level 3, EN61000-4-4Level 3)
	Static electricity resistance	Contact discharge/4kV (IEC1000-4-2Level 2, EN61000-4-2Level 2) Atmospheric discharge/8kV (IEC1000-4-2Level 3, EN61000-4-2Level 3)
Vibration resistance	Sweep resistance	10 - 57Hz/semi-amplitude 0.15mm, 57 - 150Hz/2.0G 80minutes each in X, Y, and Z directions (JIS C0040-compliant, IEC68-2-6-compliant)
Impact resistance		15G half-sine shock for 11ms in X, Y, and Z directions (JIS C0041-compliant, IEC68-2-27-compliant)

*1 When using a POW-AD22GY


⚠ CAUTION

When connecting one of the modules to a controller module, the internal current consumption should be taken into account. If the total current exceeds the capacity of the power supply unit, the integrity of the operation cannot be guaranteed. For further details, please see the Controller Module manual.

Block Diagram

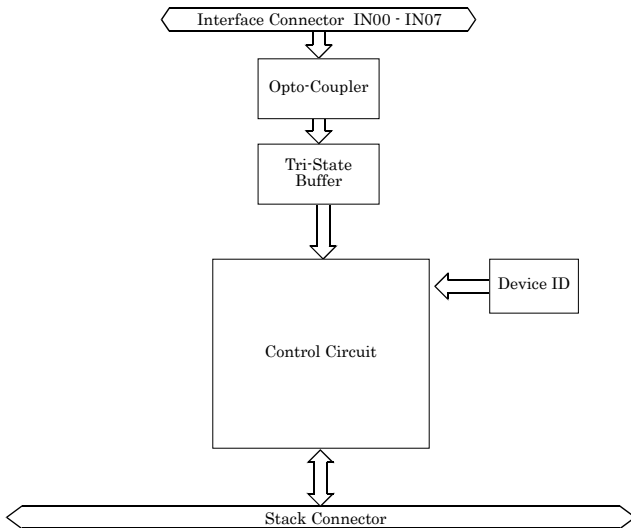

Physical Dimensions

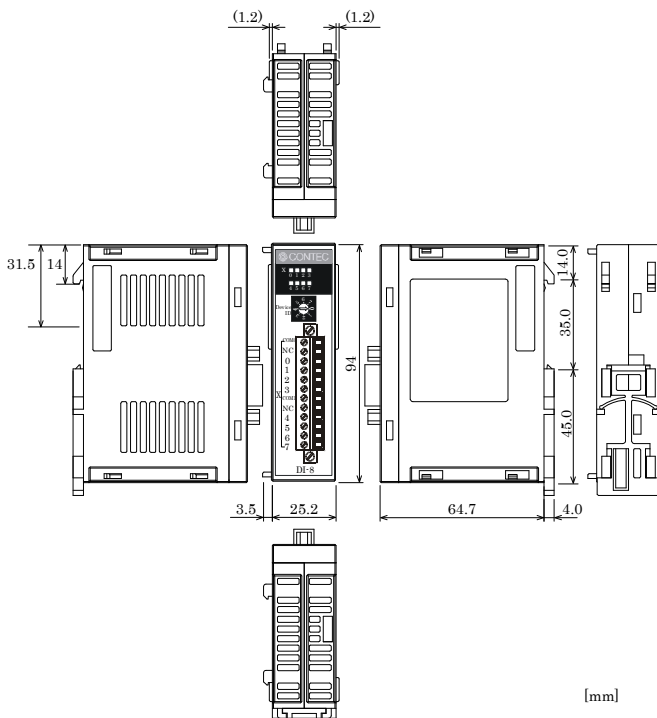

Functions and control method by controller connected

This product can be connected to a variety of controllers.

Supported controllers

Microcontroller Unit	: CPU-SBxx(FIT)GY
I/O Controller Module	: CPU-CAXx(FIT)GY
Monitoring & Control Server Unit	: SVR-MMF2(FIT)
Monitoring & Control Server Unit	: SVR-MMF(FIT)GY

Check each controller to which the module can be connected as well as the method of controlling the module when connected to that controller.

Connections to controllers

	CPU-SBxx(FIT)GY	CPU-CAXx(FIT)GY	SVR-MMF2(FIT)	SVR-MMF(FIT)GY
O: Permitted x: Not permitted				
DIO-4/4(FIT)GY	o	o	o	o
DI-8(FIT)GY	o	o	o	o
DO-8(FIT)GY	o	o	o	o
Device ID setting range	0 - 7	0 - 7	0 - 7	0 - 7

Control method by controller connected

	CPU-SBxx(FIT)GY	CPU-CAXx(FIT)GY	SVR-MMF2(FIT)	SVR-MMF(FIT)GY
Control using the I/O address map	o			
Control using the memory address map		o		
Control via the Windows driver *	FIT Protocol	o		
	API-CAP(W32)	o		
	API-SBP(W32)	o		
Control over the web (as set from within the browser)			o	o

* The API-SBP(W32) is included in the development kit [DTK-SBxx(FIT)GY]; the other drivers are bundled with each controller.

Control using the I/O address map

When connected to the CPU-SBxx(FIT)GY, the module can receive I/O instructions directly from the controller module.

Control using the memory address map

When connected to the CPU-CAXx(FIT)GY, the module can be accessed from the host computer over the network. The module is assigned with its device ID in the memory managed by the controller module. The application running on the host computer controls the module by reading/writing the memory managed by the controller module.

Control via the Windows driver

For the functions and settings available when using the Windows driver, refer to the reference manual and online help for each module.

Control over the web


You can monitor collected data and manage the log over the web. You can use your familiar browser to easily make various settings. For details, refer to the reference manual for the SVR-MMF2(FIT), SVR-MMF(FIT)GY.

Interface Connector

How to Connect an Interface Connector

When connecting the Module to an external device, you can use the supplied connector plug.

To wire the Module, strip the sheath about 9 - 10mm from an end of the wire and insert the exposed wire into an opening. Tighten the screw to fasten the inserted wire. Applicable wires are AWG28 - 16.

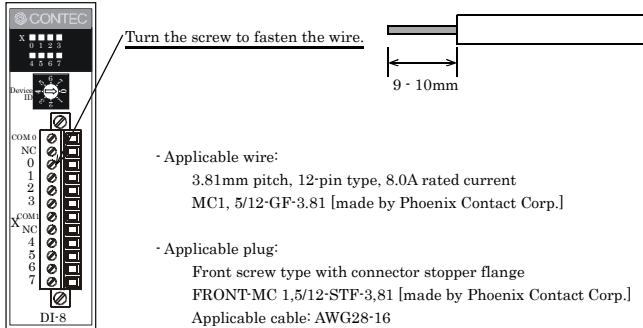


CAUTION

Removing the connector plug by grasping the cable can break the wire.

Signal Layout on the Interface Connector

The Module can be connected to an external device using a 12-pin connector that is provided on the Module face.

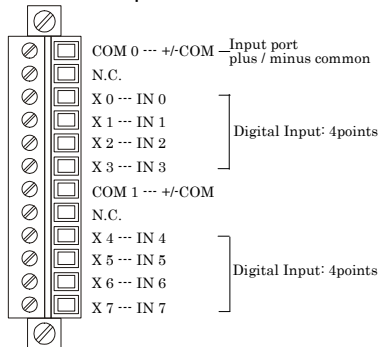


External Input Circuits

Input section


Figure below shows the input equivalent circuit for the interface section of this product.

The signal input section consists of an Optocoupler isolated input (compatible with both current sink output and current source output). An external power supply is therefore required to drive the input section of this module. The power requirement for the <DIO-4/4(FIT)GY> or <DI-8(FIT)GY> is about 8 mA per input channel at 24 VDC (about 4 mA at 12 VDC).


Input Circuit

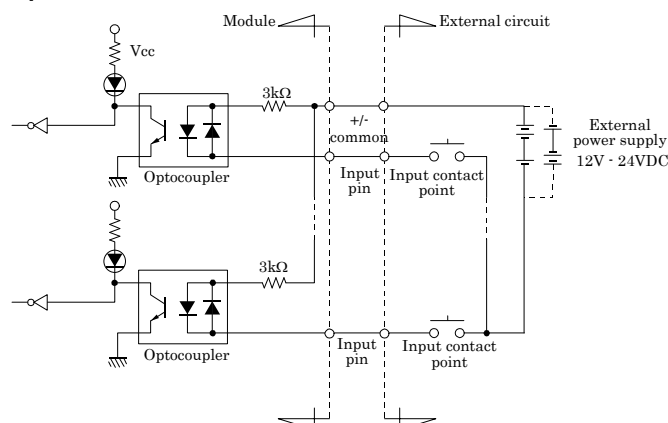

Example of a Connection to Current Sink Output

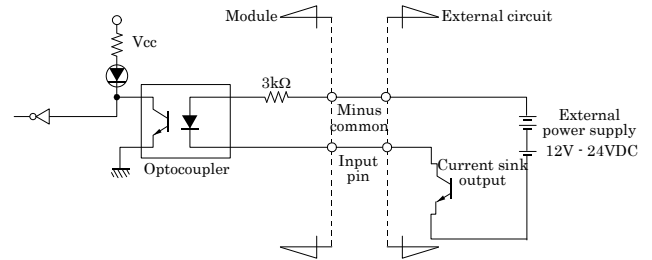


Example of a Connection to Current Source Output

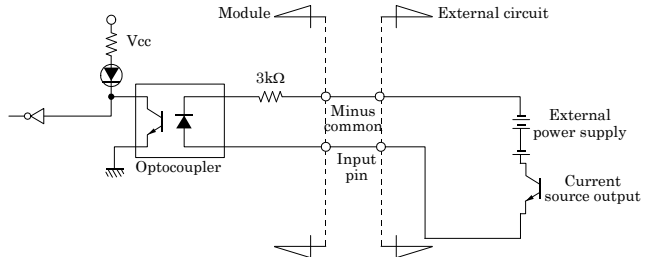


Connection example:

Using Inputs X0

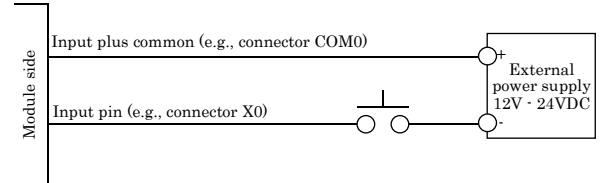

Example of Connecting Outputs and Inputs

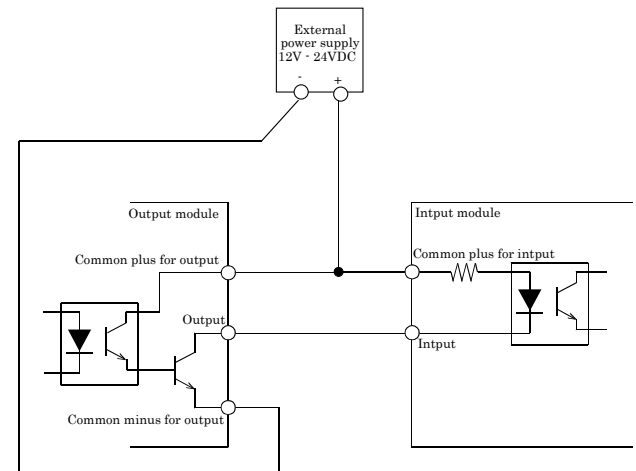

Setting a Device ID

The controller module distinguishes and keeps track of the modules that are connected to it by assigning device IDs to them. Each module, therefore, should be assigned a unique ID.

A Device ID can be assigned in a 0 - 7 range, so that a maximum of eight modules can be distinguished. The factory setting for the Device ID is [0].

Setup Method

A Device ID can be set by turning the rotary switch that is located on the module face.

A Device ID can be assigned by turning the switch.

